


Preparing, Conveying

# Inspection table with belt

The inspection table has two to four workstations at the conveyor belt for the visual inspection of the quality of raw or peeled or cut products.

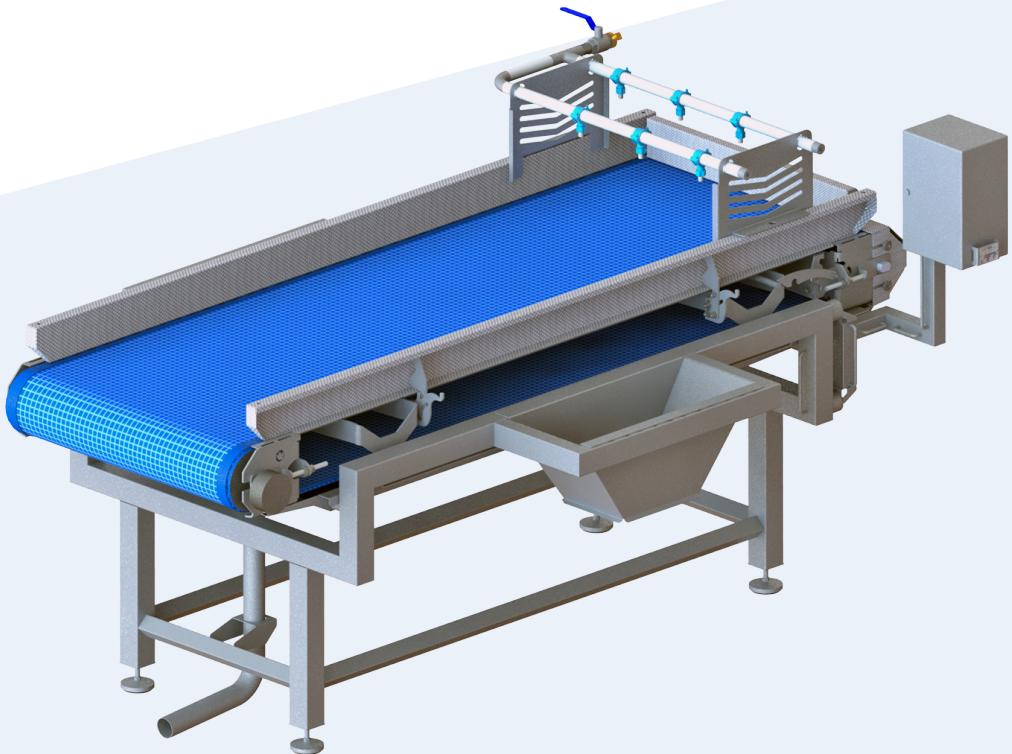

## Your benefits

- ✓ Robust construction
- ✓ Easy to clean

## Product groups



## Portrait

### Efficiently sorting raw material and checking peeling and cutting quality

The inspection table with belt enables the smooth transport of raw products or peeled and cut fruit and vegetables between different processing machines or acts as a conveyor belt to forward the products, for example into a washing machine. A visual inspection of the quality of the products is performed by the operators. The two laterally mounted waste chutes enable the targeted removal of sorted-out products and waste at two to four workstations.

The transport speed is 0.25 meters per second; the belt is also optionally available with adjustable speed. The inspection table is available in different versions, depending on the various production requirements.

## Technical data

<b>Electrical power</b>	Power	0.55 kW (.74 HP)
	Voltage	380 V
<b>Dimensions</b>	LxWxH	depending on the configuration
	Weight	depending on the configuration
	Belt width	700 mm (27.6")

The data indicated are standard information. In addition, adaptation to other supply networks (e.g. 230V/60 Hz) is optionally possible (except for manual and pneumatic machines). Subject to changes.