


Urschel® Model CC-DL

HIGH CAPACITY SHREDDER, SLICER, & STRIP CUTTER

Food processors rely on the Model CC-DL to shred, slice, strip cut, or granulate a variety of products including cheese, potatoes, other vegetables/fruits, bakery products, cooked meats, and pet food. It features a large 32" (813 mm) diameter cutting zone enclosure and a 10 HP (7.5 kW) motor to promote a higher capacity and diminish product build-up. The stainless steel machine features continuous operation for uninterrupted production and is designed for easy clean-up and maintenance. The CC-DL will accept products measuring up to 3-7/8" (98 mm) in any dimension.



CUTS

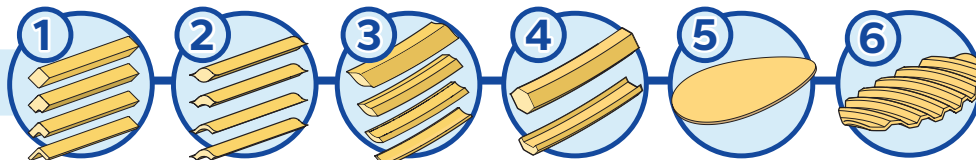

1 Full Shreds & Reduced V Shreds

Full Shred:

Diamond-shaped cross section available in four thicknesses: .070, .097, .125, or *.285" (1.8, 2.5, 3.2, or *7.2 mm).

Reduced V Shred:

"V"-shaped cross section

2 Oval Shreds & Reduced Oval (Crescent) Shreds

.250" Oval Shred:

Oval-shaped cross section approximately .125" (3.2 mm) thick by .250" (6.4 mm) wide.

Crescent Shred:

Crescent-shaped cross section.

3 Wide Oval Shreds & Wide Reduced Oval (Crescent) Shreds

.480" Wide Oval Shred:

Wide oval-shaped cross section .152" (3.7 mm) thick by .480" (12.2 mm) wide.

Wide Crescent Shred:

Wide crescent-shaped cross section.

4 Full & Reduced Flat-V® Shreds

Full Flat-V Shred:

Hexagonal-shaped cross section approximately .150" (3.8 mm) on all sides.

Reduced Flat-V Shred:

Flattened top and bottom that form a corrugated shred.

5 Flat Slice

Slice thickness up to .500" (12.7 mm)

6 Flat-V® Slice

Slice thickness up to .180" (4.6 mm) with 2.1 corrugations per inch. Corrugation depth of .125" (3.2 mm); Centers: .473" (12 mm).

7 **Z-Cut Slice

Slice thickness up to .325" (8.3 mm) with 2.1 corrugations per inch. Corrugation depth of .135" (3.4 mm); Centers: .394" (10 mm)

8 V Slice

Slice thickness up to .500" (2.5 mm)

.125" Slice: 8 complete "V's" per inch. "V" depth of .050" (1.3 mm); Centers: .125" (3.2 mm).

.212" Slice: 4.7 "V's" per inch. "V" depth of .084" (2.1 mm); Centers: .212" (5.4 mm)

9 Crinkle Slice

Slice thickness up to .500" (12.7 mm).

.175" Slice: Crinkle Depth .084" (2.1 mm), Centers .175" (4.4 mm),

.300" Slice: Crinkle Depth .080" (2.0 mm), Centers .300" (7.6 mm).

.480" Slice: Crinkle Depth .076" (1.9 mm), Centers .480" (12.2 mm).

10 Strip Cut

Rectangular cross section.

Width: 3/32, 1/8, 3/16, 1/4, 3/8, 1/2, 9/16, or 3/4" (2.4, 3.2, 4.8, 6.4, 9.5, 12.7, 14.3, or 19 mm)

11 Grating Options


Grating heads offer cuts such as powdered parmesan, coarse granules, and shreds.



* Limited availability based on customer application. Contact your local Urschel office to verify salability.

** Z-Cut is only available in non-European countries.

CUTTING OVERVIEW

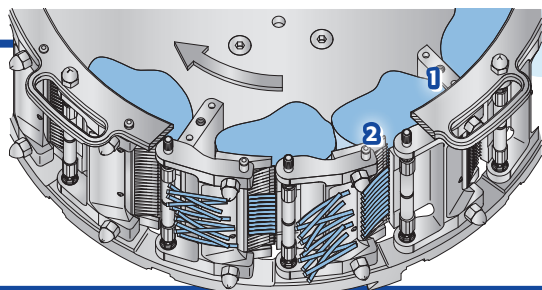

1. Impeller Paddle
2. Shredding Knife

If your product application is not mentioned on this page, contact your local Urschel representative to determine the most effective solution to your size reduction needs.

URSCHEL® MODEL CC-DL





Measurements and weights may vary depending on machine configuration.

Length: 62.13" (1578 mm)
Width: 37.30" (947 mm)
Height: 34.30" (871 mm)
Net Weight: ... 700 lb (318 kg)
Motor: 10 HP (7.5 kW)



*Model CC-DL Image Shows:
 32" Diameter Enclosure,
 10 HP Stainless Steel Motor,
 Right Side Electrical*

SPECIFICATIONS & DIMENSIONS

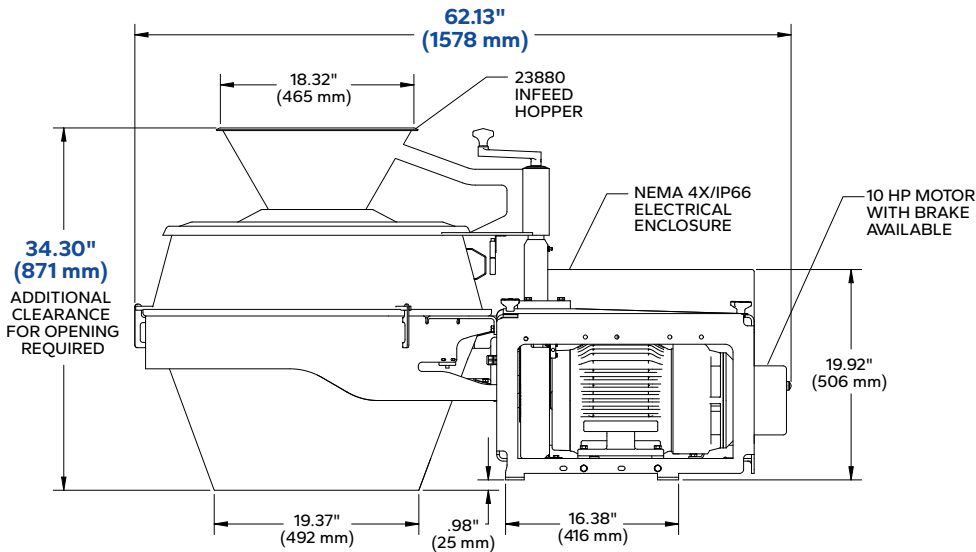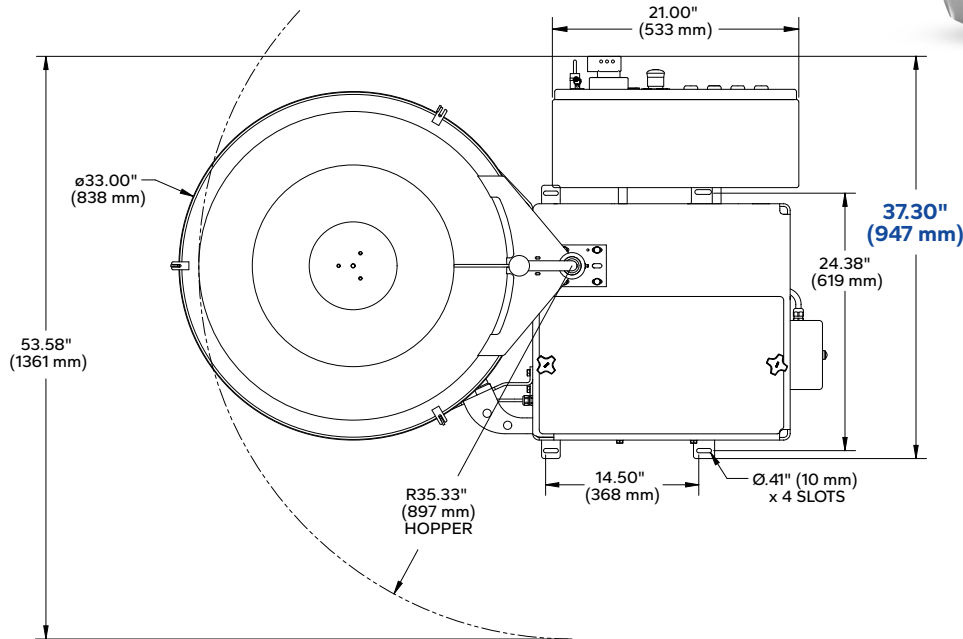

Test Cut Your Product

Contact your local Urschel representative to schedule a comprehensive, no-obligation test-cut of your product: www.urschel.com.



URSCHEL®

The Global Leader in Food Cutting Technology

www.urschel.com | info@urschel.com

© Urschel logo symbol, Urschel, The Global Leader in Food Cutting Technology, and Flat-V are registered trademarks of Urschel Laboratories, Inc.
 †† The Model CC series may contain parts protected by U.S. & International Patent nos. 7658133, 8161856, 9469041, 9517572, 9840015, 9849600, 9862113, 9902080, 10279495, 10328598, 10456943, 10562203, 10780602, 10786922, 10807268, 10933552, 11298849, 12083699, 11027450, 11090829, 11117285, 11364650, 11428519, 12097634, 12220831, 12280515, 25158412.4, 251811071, 2022-567261, 2022292660, 2024219748, BR112023024929-5, 3220790, 22825803.4, and 2023-576056.