
Urschel® Model CC

VERSATILE SLICER, SHREDDER, & GRANULATOR



Food processors rely on the Urschel ‡‡Model CC to produce precise, uniform slices and shreds at high production capabilities with excellent results including potato slices, shredded cheese, and many other reductions including nuts, vegetables, and pet food. Laser-cut frame design delivers increased sanitation and flexibility. Choose from left- or right-side electrical enclosure machine build. Options include cutting enclosure choices of 22" (559 mm), 26" (660 mm), or 32" (813 mm) and motor choices of 2 HP (1.5 kW), 5 HP (3.7 kW), or 10 HP (7.5 kW). The stainless steel slicer features continuous operation for uninterrupted production and is designed for easy cleanup and maintenance. The Model CC will accept products measuring not to exceed 3-3/4" (95 mm) in any dimension.

CUTS

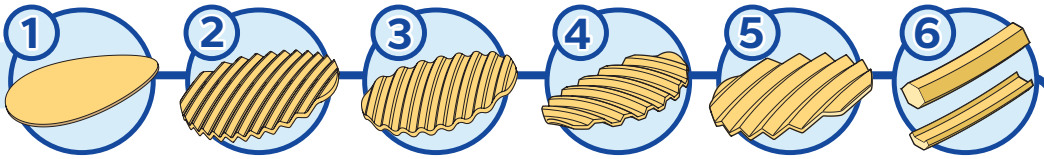

1 Flat Slice
Slice thickness up to .500" (12.7 mm)

2 V Slice
Slice thickness up to .500" (12.7 mm)

.125" Slice: 8 "V's" per inch. "V" depth of .050" (1.3 mm); Centers: .125" (3.2 mm).

.212" Slice: 4.7 "V's" per inch. "V" depth of .084" (2.1 mm); Centers: .212" (5.4 mm).

3 Crinkle Slice
Slice thickness up to .500" (12.7 mm).

.175" Slice: Crinkle Depth .084" (2.1 mm), Centers .175" (4.4 mm),

.300" Slice: Crinkle Depth .080" (2.0 mm), Centers .300" (7.6 mm).

.480" Slice: Crinkle Depth .076" (1.9 mm), Centers .480" (12.2 mm).

4 Flat-V® Slice
Slice thickness up to .180" (4.6 mm) with 2.1 corrugations per inch. Corrugation depth of .125" (3.2 mm); Centers: .473" (12 mm).

5 Z-Cut Slice
Slice thickness up to .325" (8.3 mm) with 2.1 corrugations per inch. Corrugation depth of .135" (3.4 mm); Centers: .394" (10 mm).

6 Full & Reduced Flat-V® Shreds
Full Flat-V Shred: Hexagonal-shaped cross section approximately .150" (3.8 mm) on all sides.

Reduced Flat-V Shred: Flattened top and bottom that form a corrugated shred.

7 Full & Reduced V Shreds
Full Shred: Diamond-shaped cross section available in four thicknesses: .070, .097, .125, or *.285" (1.8, 2.5, 3.2, or *7.2 mm).

Reduced V Shred: "V"-shaped cross section

8 Oval & Reduced Oval (Crescent) Shreds
.250" Oval Shred: Oval-shaped cross section approximately .125" (3.2 mm) thick by .250" (6.4 mm) wide.

Crescent Shred: Crescent-shaped cross section.

9 Wide Oval Shreds & Wide Reduced Oval (Crescent) Shreds
.480" Wide Oval Shred: Wide oval-shaped cross section .152" (3.7 mm) thick by .480" (12.2 mm) wide.

Wide Crescent Shred: Wide crescent-shaped cross section.

10 Strip Cut
Rectangular cross section.


Width: 3/32, 1/8, 3/16, 1/4, 3/8, 1/2, 9/16, or 3/4" (2.4, 3.2, 4.8, 6.4, 9.5, 12.7, 14.3, or 19 mm)

11 Grating Options
Grating heads offer cuts such as powdered parmesan, coarse granules, and shreds.



* Limited availability. Contact your local Urschel office for information.

CUTTING OVERVIEW

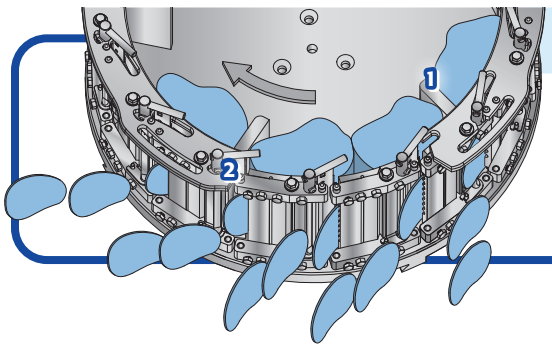

1. Impeller Paddle
2. Slicing Knife

If your product application is not mentioned on this page, contact your local Urschel representative to determine the most effective solution to your size reduction needs.

URSCHEL® MODEL CC

SPECIFICATIONS & DIMENSIONS

Measurements and weights may vary depending on machine configuration.

Length: 59.63" (1515 mm) - 2 or 5 HP
..... 61.94" (1573 mm) - 10 HP

Width:.. 45.64" (1159 mm)

Height:. 35.60" (904 mm)


Net Weight:
550 lb (250 kg) - 2 or 5 HP
680 lb (310 kg) - 10 HP

Motor:
2, 5, or 10 HP (1.5, 3.7, or 7.5 kW)



Model CC Image Shows:
24" Diameter Enclosure, Potato Hopper
2 or 5 HP Stainless Steel Motor, Right Side Electrical

32" Enclosure, 2, 5 or 10 HP
Potato Hopper, Left Side Electrical

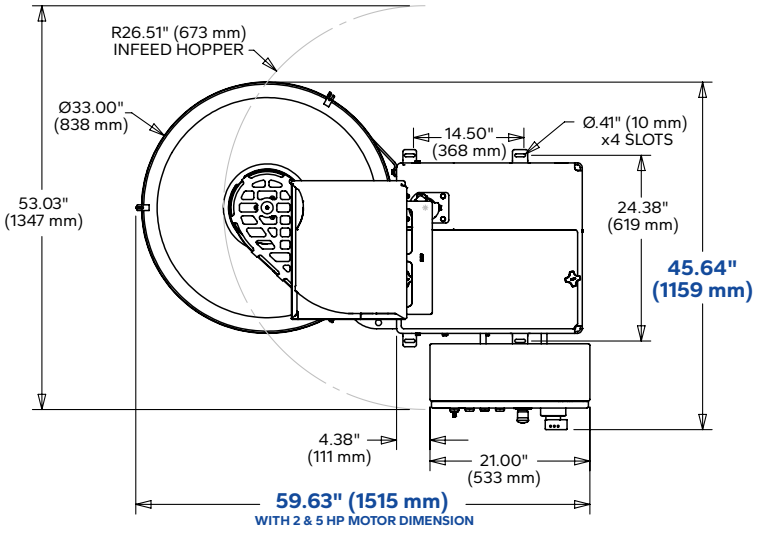

MODEL CC
Available Options for Your Line


ENCLOSURE ASSEMBLIES
22" (559 mm) Diameter Enclosure
26" (660 mm) Diameter Enclosure
32" (813 mm) Diameter Enclosure


INFEED ASSEMBLIES
Potato Hopper
Swing Away Funnel Hopper

MOTOR
2 HP (1.5 kW)
5 HP (3.7 kW)
10 HP (7.5 kW)

ELECTRICAL ENCLOSURE
Left or Right Side

32" Enclosure, 2 or 5 HP
Swing Away Funnel Hopper

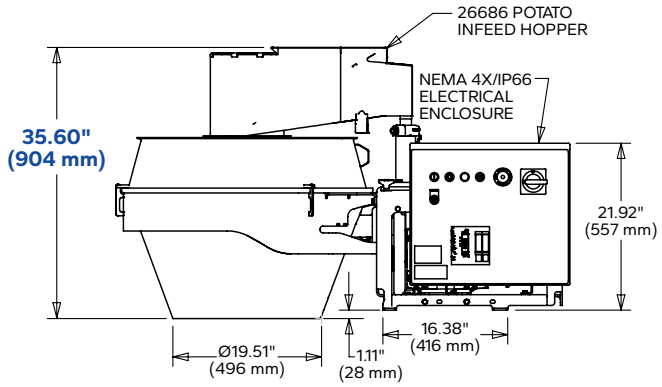

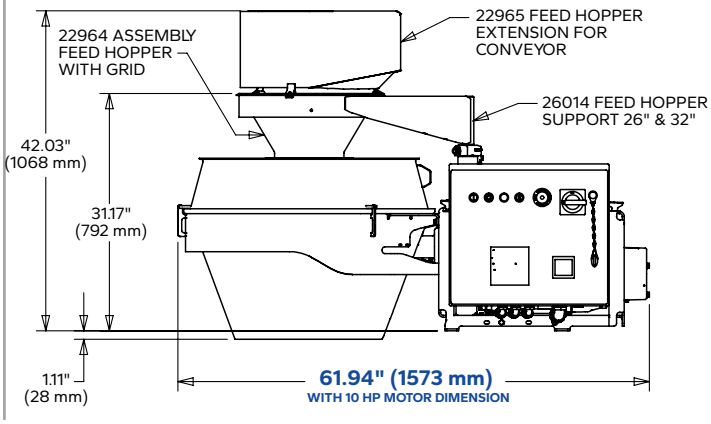

Test Cut Your Product

Contact your local Urschel representative to schedule a comprehensive, no-obligation test-cut of your product: **www.urschel.com.**

URSCHEL®
The Global Leader in Food Cutting Technology
www.urschel.com | info@urschel.com

® Urschel logo symbol, Urschel, The Global Leader in Food Cutting Technology, and Flat-V are registered trademarks of Urschel Laboratories, Inc.
‡‡ The Model CC series may contain parts protected by U.S. & International Patent nos. 7658133, 8161856, 9469041, 9517572, 9840015, 9849600, 9862113, 9902080, 10279495, 10328598,10456943, 10562203, 10780602, 10786922, 10807268, 10933552, 11298849, 12083699, 11027450, 11090829, 11117285, 11364650, 11428519, 12097634, 12220831, 12280515, 25158412.4, 25181107.1, 2022-567261, 2022292660, 2024219748, BR112023024929-5, 3220790, 22825803.4, and 2023-576056.

L4627 2026_11_12 (s.s. L3921)