
# Urschel® Model CCX-D

## HIGH CAPACITY VERSATILE SHREDDER, SLICER, & STRIP CUTTER



The ‡‡Model CCX-D Shredder features a large 32" (813 mm) diameter cutting zone. This large cutting zone combined with your choice of a 10 HP (7.5 kW) or 15 HP (11 kW) motor promotes a higher capacity and lessens product build-up. The machine is also available with a 24" (610 mm) diameter cutting enclosure. The versatile CCX-D features different interchangeable cutting heads, including the MicroAdjustable® SH-14 enabling changeovers in just minutes. Specially designed knives do not require sharpening and are inexpensive to replace. To promote sanitation, the machine features an attached swing away feed hopper, hinged access panels, sloped surfaces, and stainless steel highly polished to **U.S.D.A., Dairy Division accepted** standards. The machine features continuous operation for uninterrupted production and is designed for easy clean-up and maintenance. The Model CCX-D will accept products measuring not to exceed 3-3/4" (95 mm) in any dimension.

## CUTS

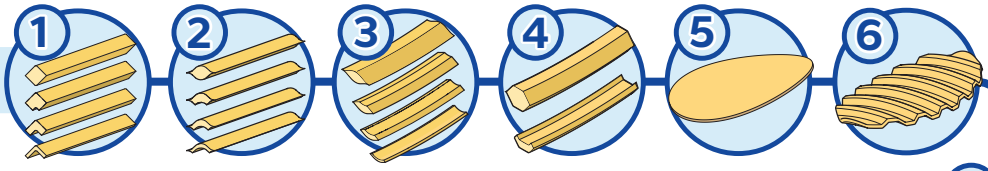


**1 Full Shreds & Reduced V Shreds**

**Full Shred:** Diamond-shaped cross section available in four thicknesses: .070, .097, .125, or *.285" (1.8, 2.5, 3.2, or *7.2 mm).

**Reduced V Shred:** "V"-shaped cross section

**2 Oval Shreds & Reduced Oval (Crescent) Shreds**

**.250" Oval Shred:** Oval-shaped cross section approximately .125" (3.2 mm) thick by .250" (6.4 mm) wide.

**Crescent Shred:** Crescent-shaped cross section.

**3 † Wide Oval Shreds & Wide Reduced Oval (Crescent) Shreds**

**.480" Wide Oval Shred:** Wide oval-shaped cross section .152" (3.7 mm) thick by .480" (12.2 mm) wide.

**Wide Crescent Shred:** Wide crescent-shaped cross section.

**4 † Full & Reduced Flat-V® Shreds**

**Full Flat-V Shred:** Hexagonal-shaped cross section approximately .150" (3.8 mm) on all sides.

**Reduced Flat-V Shred:** Flattened top and bottom that form a corrugated shred.

**5 Flat Slice**

Slice thickness up to .500" (12.7 mm)

**6 † Flat-V® Slice**

Slice thickness up to .180" (4.6 mm) with 2.1 corrugations per inch. Corrugation depth of .125" (3.2 mm); Centers: .473" (12 mm).

**7 † V Slice**

Slice thickness up to .500" (2.5 mm)

**.125" Slice:** 8 complete "V's" per inch. "V" depth of .050" (1.3 mm); Centers: .125" (3.2 mm).

**.212" Slice:** 4.7 "V's" per inch. "V" depth of .084" (2.1 mm); Centers: .212" (5.4 mm)

**8 † Crinkle Slice**

Slice thickness up to .500" (12.7 mm).

**.175" Slice:** Crinkle Depth .084" (2.1 mm), Centers .175" (4.4 mm),

**.300" Slice:** Crinkle Depth .080" (2.0 mm), Centers .300" (7.6 mm).

**.480" Slice:** Crinkle Depth .076" (1.9 mm), Centers .480" (12.2 mm).


**9 † Strip Cut**

Rectangular cross section.

**Width:** 3/32, 1/8, 3/16, 1/4, 3/8, 1/2, 9/16, or 3/4" (2.4, 3.2, 4.8, 6.4, 9.5, 12.7, 14.3, or 19 mm)


**10 † Grating Options**

Grating heads offer cuts such as powdered parmesan, coarse granules, and shreds.

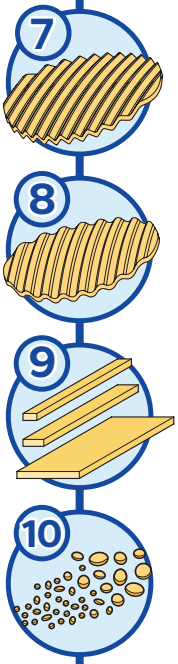


* Limited availability. Contact your local Urschel office for information.

† Not all components in these cut types may be available in highly polished U.S.D.A., Dairy Division accepted stainless steel finish.

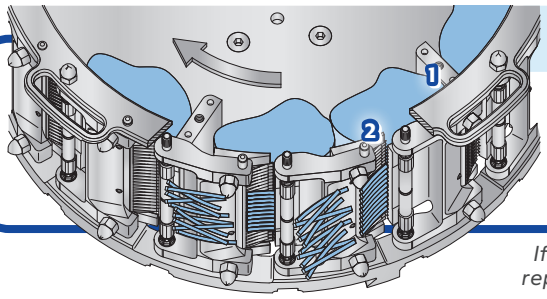


## CUTTING OVERVIEW

1. Impeller Paddle
2. Shredding Knife

*If your product application is not mentioned on this page, contact your local Urschel representative to determine the most effective solution to your size reduction needs.*

# URSCHEL® MODEL CCX-D

SPECIFICATIONS & DIMENSIONS

**Measurements and weights may vary depending on machine configuration.**

**Length:** ....53.24" (1352 mm), 24" diam. encl.
.....59.99" (1524 mm), 32" diam. encl.

**Width:**.....36.69" (932 mm) (Right Side Electrical Enclosure)

**Height:**.....32.43" (824 mm), 24" diam. encl.
.....34.10" (866 mm), 32" diam. encl.


**Net Weight:** .....1,000 lb (454 kg) - 10 HP
.....1,150 lb (522 kg) - 15 HP


**Motor:**.....10 HP (7.5 kW) or 15 HP (11 kW)


**The Model CCX-D is accepted by the U.S.D.A, Dairy Division.**




*Model CCX-D Image Shows:*
*32" Diameter Enclosure, 2-piece discharge, 10 HP Stainless Steel Motor, Right Side Electrical*

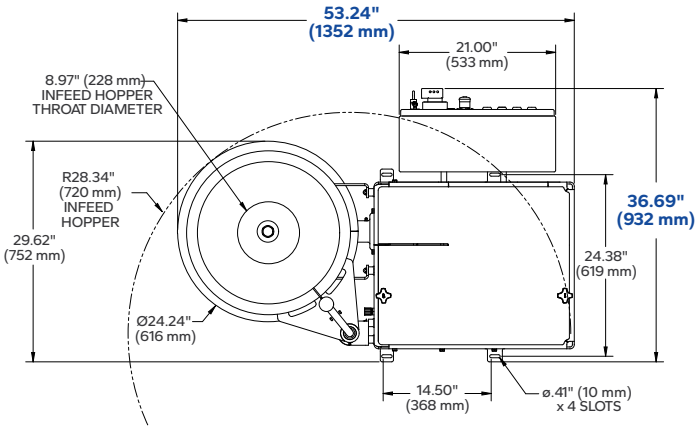

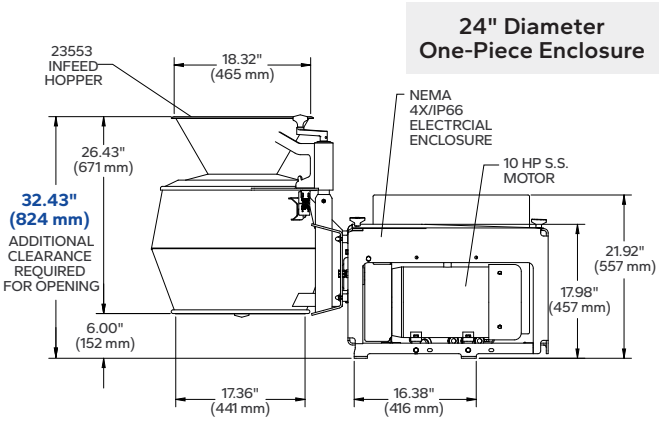
## Test Cut Your Product

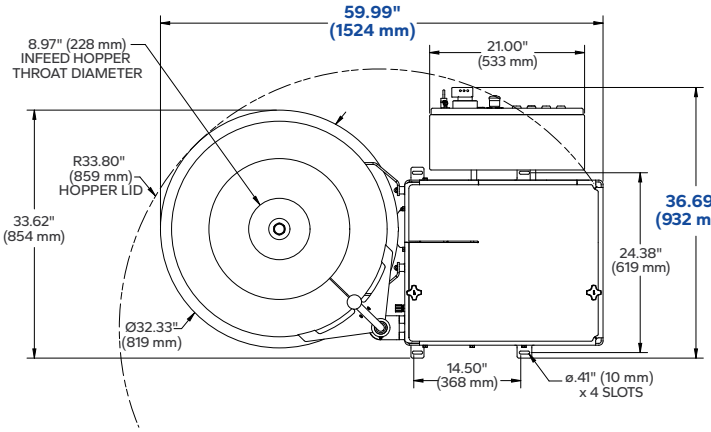Contact your local Urschel representative to schedule a comprehensive, no-obligation test-cut of your product: **www.urschel.com.**

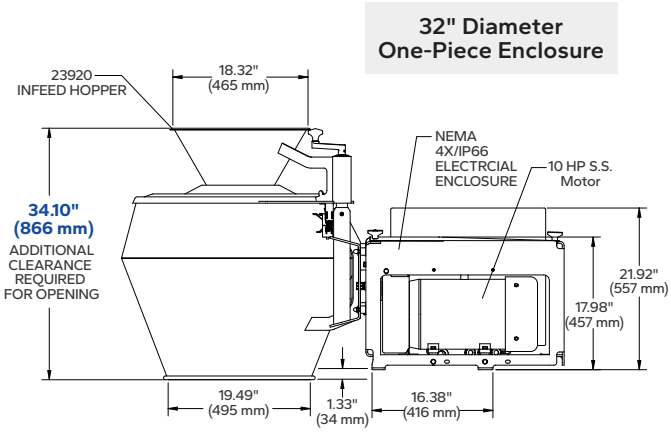URSCHEL®
The Global Leader in Food Cutting Technology
www.urschel.com | info@urschel.com

® Urschel logo symbol, Urschel, The Global Leader in Food Cutting Technology, and Flat-V are registered trademarks of Urschel Laboratories, Inc.
‡‡ The Model CC series may contain parts protected by U.S. & International Patent nos. 7658133, 8161856, 9469041, 9517572, 9840015, 9849600, 9862113, 9902080, 10279495, 10328598,10456943, 10562203, 10780602, 10786922, 10807268, 10933552, 11298849, 12083699, 11027450, 11090829, 11117285, 11364650, 11428519, 12097634, 12220831, 12280515, 25158412.4, 25181107.1, 2022-567261, 2022292660, 2024219748, BR112023024929-5, 3220790, 22825803.4, and 2023-576056.

L4630 2026_11_12 (s.s. L3321)